


# 旋启式止回阀

PN25/40

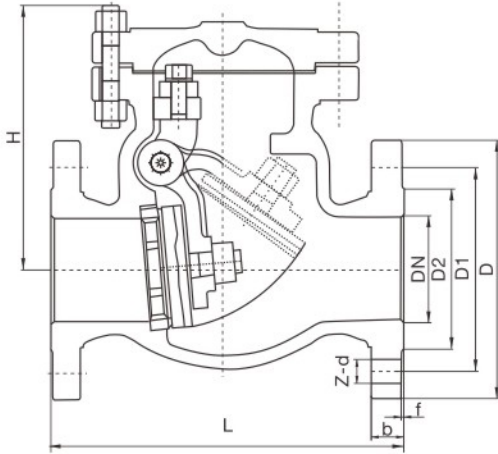

## 性能规范

试验压力(MPa)	公称压力						
	2.5	4.0	6.4	10.0	16	20	25
壳体强度试验	3.8	6.0	9.6	15.0	24.0	30	37.5
密封试验(液)	2.8	4.4	7.1	11.0	17.6	22	27.5
密封试验(气)	0.5~0.7						
适用介质	C	P	R	I			
	水、油品、蒸	硝酸类	醋酸类	水、蒸汽			
工作温度°C	≤425°C	≤200°C	≤200°C	≤550°C			

结构长度 GB/T 12221 法兰标准 JB/T 79

## 主要外形尺寸及连接尺寸

公称通径DN(mm)	公称压力PN(MPa)	L	H	D	D1	D2	D6	b	f	f2	z-d
50	2.5	230	160	160	125	100		20	3		4-18
65		290	175	180	145	120		22	3		8-18
80		310	185	195	160	135		22	3		8-18
100		350	220	230	190	160		24	3		8-23
125		400	248	270	220	188		28	3		8-25
150		480	276	300	250	218		30	3		8-25
200		550	350	360	310	278		34	3		12-25
250		650	410	425	370	332		36	3		12-30
300		750	430	485	430	390		40	4		16-30
350		850	518	550	490	448		44	4		16-34
400		950	560	610	550	505		48	4		16-34
500	1150	618	730	660	610		52	4		20-41	
50	4.0	230	169	160	125	100	88	20	3	4	4-18
65		290	173	180	145	120	110	22	3	4	8-18
80		310	185	195	160	135	121	22	3	4.5	8-18
100		350	220	230	190	160	150	24	3	4.5	8-23
125		400	248	270	220	188	176	28	3	4.5	8-25
150		480	270	300	250	218	204	30	3	4.5	8-25
200		550	342	375	320	282	260	38	3	4.5	12-30
250		650	401	445	385	345	313	42	3	4.5	12-34
300		750	423	510	450	408	364	46	4	4.5	16-34
350		850	455	570	510	465	422	52	4	5	16-34
400		950	510	655	585	535	474	58	4	5	16-41